#### **SUMMARY OF FINDINGS**

#### SYSTEM EVALUATION

Comprehensive analysis revealed adequacies, deficiencies, and overlaps for the current airport system. System performance measures guided the system evaluation process. Each performance measure has a set of quantifiable benchmarks which determine current performance. Results are used to establish targets for future system performance.

OKLAHOMA SYSTEM -PERFORMANCE MEASURES -

A SYSTEM THAT IS SAFE

A SYSTEM THAT IS **EFFICIENT** 

A SYSTEM THAT IS
ACCESSIBLE

A SYSTEM THAT SUPPORTS
THE ECONOMY

A SYSTEM THAT MEETS USER NEEDS

# AIRPORT ROLES AND FACILITY SERVICE OBJECTIVES

Each airport in Oklahoma plays a different role in their community based on the aircraft and customers it serves. Detailed investigation scored and ranked each airport to establish its system role as either a National Business, Regional Business, General, or Community airport. Each role category has facility and service objectives considered desirable for meeting user needs. Each airport's report card shows projects needed to meet system plan objectives. Report cards also reflect additional investment to address airport identified projects.

## AIRPORTS IN OKLAHOMA ARE ASSIGNED TO ONE OF FOUR STATE ROLES:














#### **CONCLUSIONS**

#### **ESTIMATED COSTS**

The Oklahoma airport system currently functions at a relatively high level, but if airports are able to meet their individual facility and service objectives, that performance could improve.

The final step in the system plan was to develop planning level cost estimates associated with improving system airports to meet their facility and service objectives. In addition, information was collected from study airports to identify other projects they plan to implement. Combining system plan identified projects with airport identified projects provides a more holistic understanding of the system's financial needs in the next 20 years.

Costs were summarized by airport role and allocated to show the costs needed to implement system plan identified projects and airport identified projects.

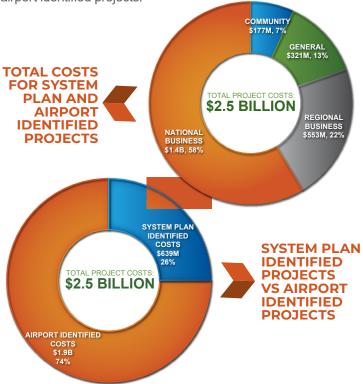

#### POTENTIAL FUNDING GAP

Considering all investment needs, an average of \$125.1 million would be needed in each of the next 20 years to fully address the identified costs. Review of historic and anticipated FAA, state, and local funding sources shows an average of \$85.8 million in funding could be available if current funding levels continue. This leaves a potential annual funding gap of \$39.2 million; considering this gap, it is important that available funding be strategically invested. It is also important to note that while the airports have an annual investment need of \$125.1 million, the airports return an estimated \$10.6 billion to the state's economy each year.

The system plan provides important information to OAC, helping to direct available funding to airport projects most essential to meeting the state's transportation needs and economic objectives.

#### FOR MORE INFORMATION CONTACT

Oklahoma Aeronautics Commission
110 N Robinson Ave. Suite 200 | Oklahoma City, OK 73102
405.604.6900 | oac.ok.gov



# PURCELL MUNICIPAL AIRPORT PURCELL, OKLAHOMA

**OKLAHOMA** 

AIRPORT SYSTEM PLAN



In late 2020, the Oklahoma Aeronautics Commission (OAC) undertook a comprehensive update to its State Airport System Plan. The plan was completed in 2022. This report summarizes major statewide findings, but it focuses primarily on the findings and recommendations from the plan for Purcell Municipal Airport.

PREPARED BY


JVIATION

A WOOLPERT COMPANY

#### OKLAHOMA AIRPORT SYSTEM PLAN

The update to the Oklahoma Airport System Plan followed Federal Aviation Administration (FAA) guidelines. Airports in Oklahoma provide businesses, residents, and visitors with a high level of accessibility to a wide variety of airports and aviation services. Implementing strategic improvements and focused investment recommendations from the plan can elevate the airport system's current performance.

#### **OKLAHOMA'S STATE AIRPORT SYSTEM**

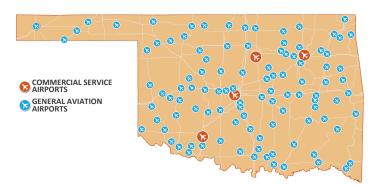

#### SYSTEM CHARACTERISTICS

108 total system airports

4 airports with commercial airline service

104 general aviation airports

90% of airports included in FAA's National Plan of Integrated Airport Systems (NPIAS)

Airports included in the NPIAS are eligible for FAA funding. FAA, OAC, and airport sponsor partnerships are important for maintaining and improving the airport system.

#### INVENTORY

The plan started with a comprehensive inventory effort; information was collected on airport activity, facilities, and services. Special inventory efforts focused on:

- Airport control of runway protection zones (RPZs)
- Runway safety areas (RSAs) meeting FAA standards
- Parallel runways/taxiways meeting separation standards
- Primary runways with clear 20:1 approaches
- Airports with property open for development
- Hangar storage and general aviation terminal building characteristics

Data collected as part of the system plan is stored in a Geographic Information System database; the database is accessible at oac.ok.gov.

### **PURCELL MUNICIPAL AIRPORT (303)**

STATE HOUSE DISTRICT 42 | STATE SENATE DISTRICT 43

#### **OVERVIEW**

The system plan identifies strategies for improving Oklahoma's 108 commercial and general aviation airports. Each airport's improvements identified in the system plan are focused on helping the airport meet its designated role in the state system. By implementing individual airport recommendations, a higher level of system-wide performance will be achieved. System plan findings and recommendations for PURCELL MUNICIPAL AIRPORT are discussed in this report.



# PURCELL MUNICIPAL AIRPORT (303)



#### **KEY AIRPORT CHARACTERISTICS**

FAA/NPIAS ROLE: BASIC STATE ROLE: GENERAL OWNER: CITY OF PURCELL PRIMARY RUNWAY: 17 / 35 APPROACH TYPE: VISUAL BASED AIRCRAFT: 10 SERVICES: AVGAS



#### **AIRPORT ROLE**

The system plan included detailed analysis to establish a role for each airport. The analysis assigned the **Purcell Municipal Airport** to the General role category. To determine the airport's role assignment, the following factors were considered:

- Total based aircraft, annual operations, and business jet activity
- Runway length, approach type, and air traffic control tower
- Airport reference code (ARC) and fuel type
- Community size and support, along with federal airport role
- Historic and projected rate of population and employment growth
- Business ready characteristics and annual economic impact

#### **PURCELL MUNICIPAL AIRPORT**



**GENERAL AIRPORT CHARACTERISTICS** 

**MINIMUM RUNWAY LENGTH OBJECTIVE: 4,000 FEET** 

MARKETS SERVED: PREDOMINANTLY SERVE SMALLER MID-SIZED COMMUNITIES IN OKLAHOMA

AIRCRAFT SUPPORTED: TWIN-ENGINE PLANES AND SMALL BUSINESS JETS

**SUITED FOR: TRAVEL TO REGIONAL DESTINATIONS** 

**PRIMARY RUNWAY: SERVED BY A PUBLISHED APPROACH** 

FACILITY/SERVICE OBJECTIVES: A PUBLIC TERMINAL AND 100LL FUEL

#### AIRPORT REPORT CARD FOR PURCELL MUNICIPAL AIRPORT

| AIRPORT ROLE: GI                      | ENERAL (LOW ACTIVITY)                           | AIRPORT NAME: PU                         | JRCELL MUNICIPAL      | CITY: PURCELL                            | LOCID: 303     |
|---------------------------------------|---|--|-----------------------|--|----------------|
| FACILITIES                            | OBJECTIVE                                       | ACTUAL                                   | MEETS OBJECTIVE       | IMPROVEMENT NEEDED                       | ESTIMATED COST |
|                                       | <u> </u>  | AIRSIDE FAC                              | ILITIES               |  |                |
| Airport Reference Code                | B-I   | B-I Small                                | No                    | Meet B-I ARC Standards                   | ,              |
| Primary Runway Length                 | 4,000 ft  | 3,003 ft                                 | No                    | Lengthen Runway 997 ft                   | \$3,988,000    |
| Primary Runway Width                  | 75 ft   | 60 ft                                    | No                    | Widen Runway 15 ft                       | \$1,351,350    |
| Taxiway Type                          | Turnaround both RWY ends                        | Turnaround One RWY End                   | No                    | Construct Partial Parallel TWY**         | \$894,737      |
| Runway Lighting                       | MIRL  | MIRL                                     | Yes                   | -  |                |
| Taxiway Lighting                      | Not an Objective                                | None                                     | Not an Objective      | -  |                |
| Approach Type                         | Non-Precision                                   | Visual                                   | No                    | Establish Published Approach             | \$150,000      |
| Approach Lighting System              | Not an Objective                                | None                                     | Not an Objective      | -  |                |
| Rotating Beacon                       | Yes   | Yes                                      | Yes                   | -  |                |
| Segmented Circle                      | Yes   | Yes                                      | Yes                   | _  |                |
| Wind Cone                             | Yes   | Yes                                      | Yes                   | -  |                |
| Visual Guidance Slope Indicator       | 2 box PAPI both RW ends                         | Neither End                              | No                    | Install 2 Box PAPI on both RWY Ends      | \$100,000      |
| Runway End Identifier Lights          | On RWY end with Approach                        | No REILs                                 | No                    | Install REILs one One RWY End            | \$100,000      |
| Weather Reporting                     | Not an Objective                                | None                                     | Not an Objective      | -  |                |
| Primary RWY PCI                       | 70  | 66                                       | Yes                   | -  |                |
| Weight Capacity                       | 12,500 SW or 30,000 DW                          | 9,500 SW                                 | No                    | Increase Weight Bearing Capacity         | \$3,243,240    |
| Covered Storage                       | 100% of Forecasted Based AC                     | 83%                                      | No                    | 2 spaces                                 | \$120,000      |
| Ramp Area                             | 3,500 SY (5 spaces)                             | 4,800 SY                                 | Yes                   | -  |                |
|                                       |   | GENERAL AVIATIO                          | N FACILITIES          |  |                |
| Terminal Building                     | 750 sqft  | No Terminal                              | No                    | Build Terminal of at least 750 sqft      | \$487,500      |
| Restroom (24/7 or key code)           | Yes   | No                                       | No                    | Add Restroom or Add 24/7 access/Key Code | \$90,000       |
| Conference Area                       | Not an Objective                                | No                                       | Not an Objective      | -  |                |
| Pilot's Lounge                        | Yes   | No                                       | No                    | Add Pilot's Lounge                       | \$80,000       |
| Office Space for Airport Manager      | Not an Objective                                | No                                       | Not an Objective      | -  |                |
| Public Waiting Area                   | Not an Objective                                | No                                       | Not an Objective      | -  |                |
|                                       |   | SERVIC                                   | ES                    |  |                |
| Fuel                                  | AvGas   | AvGas                                    | Yes                   | -  |                |
| Jet Fuel (24/7 trucking)              | Not an Objective                                | No                                       | Not an Objective      | -  |                |
| Fixed-Base Operator                   | Not an Objective                                | No                                       | Not an Objective      | -  |                |
| Aircraft Maintenance                  | Not an Objective                                | No Maintenance                           | Not an Objective      | -  |                |
| Ground Transportation                 | Yes   | No                                       | No                    | Establish Mode of Ground Transportation  | ,              |
| Overnight Aircraft Storage            | Not an Objective                                | No Data                                  | Not an Objective      | -  |                |
| GPU                                   | Not an Objective                                | No                                       | Not an Objective      | -  |                |
| LAV Service Cart                      | Not an Objective                                | No                                       | Not an Objective      | -  |                |
|                                       |   | COMPLIANCE WITH                          | FAA GUIDANCE          |  |                |
| RPZ Control                           | Airport Controls all RPZs                       | Full Control                             | Yes                   | -  |                |
| RSA Standards                         | Compliance with RSA Standards                   | 120' x 240' beyond RWY end               | Yes                   | -  |                |
| Runway/Taxiway Separation             | 150 ft  | N/A                                      | -                     | -  |                |
| Height Zoning                         | Jurisdiction with Height Zoning Ordiance        | Purcell/McClain - Yes                    | Yes                   | -  |                |
| 20:1 Surface Obstructions             | 20:1 Surface Clear of Obstructions              | No Obstruction                           | Yes                   | -  |                |
| *Costs are provided only if available | e from airport identified project list ** Airpo | ort identified project and cost substitu | ited for OASP project | System Plan Project Cost Subtotal:       | \$10.605.000   |

# FACILITY AND SERVICE OBJECTIVES

Airports in Oklahoma should ideally be equipped with facilities and services to fulfill their designated role in the state airport system. As part of the system plan a report card was developed for each airport. The report card compares current facilities and services to those for each airport's recommended role and any deficiencies are noted. Costs to address most noted deficiencies are also identified in the plan.

# INVESTMENT TO SUPPORT AIRPORT IMPROVEMENT

Over the next 20 years, a total cost of **\$16.4 million** was identified to improve the **Purcell Municipal Airport**. These costs include those needed to address both system plan and airport identified projects.

On an average annual basis, it is estimated that at least \$820,000 will be needed to improve and maintain the airport. According to an OAC study, the airport has \$860,000 in annual economic impact. This benefit should be considered to provide context for the airport's estimated annual financial need.

# FINDINGS FOR PURCELL MUNICIPAL AIRPORT

Ideally, all airports should be improved to meet their system plan identified projects. Prior to implementation, some projects will require demand justification, master planning, environmental analysis, and engineering/permitting. Some airports may have constraints that preclude them from developing all system plan identified projects.

A snapshot of some of the more notable projects identified for **Purcell Municipal Airport** follows. Appendix C of the System Plan's Technical Report contains a complete listing of airport and system plan identified projects for the airport.



**LENGTHEN AND WIDEN RUNWAY** 

**CONSTRUCT TAXIWAY\*** 

**ESTABLISH PUBLISHED APPROACH** 

**INSTALL VGSI** 

**BUILD GENERAL AVIATION TERMINAL** 

**CONSTRUCT ADDITIONAL HANGARS\*** 

\*Indicates airport identified project

